

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



553795

(43) International Publication Date
4 November 2004 (04.11.2004)

PCT

(10) International Publication Number
WO 2004/094772 A1

(51) International Patent Classification⁷: **E21B 10/28**,
7/28, E21D 9/10

(74) Agents: **KARLSTRÖM**, Lennart et al.; NORÉNS
PATENTBYRÅ AB, Box 10198, S-100 55 STOCKHOLM
(SE).

(21) International Application Number:
PCT/SE2004/000551

(22) International Filing Date: 7 April 2004 (07.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0301167-3 22 April 2003 (22.04.2003) SE

(71) Applicant (for all designated States except US): **ATLAS
COPCO SECOROC AB** [SE/SE]; Box 521, S-737 25
FAGERSTA (SE).

(72) Inventor; and


(75) Inventor/Applicant (for US only): **HOLMGREN**, Lars
[SE/SE]; Pilgatan 14, S-733 37 Sala (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: A ROCK DRILL BIT ASSEMBLY

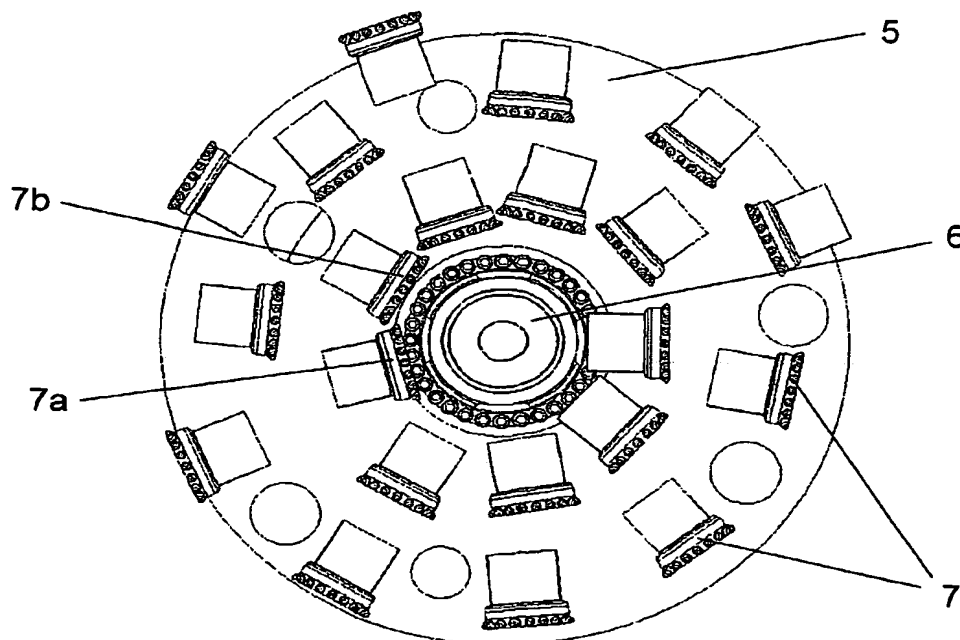

(57) Abstract: A drill bit assembly for direct removal of rock by means of a rotatable bit assembly (5) that includes a plurality of cutters or choppers (7). According to the invention, a number of cutters (7) are so disposed in relation to each other on the bit assembly (5) that a subsequent cutter (7b), seen in the direction of rotation, will engage an edge created by the action of a preceding cutter (7a).

WO 2004/094772 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*